


YKW60 Series Hollow Rotary Actuators

Naming Rules

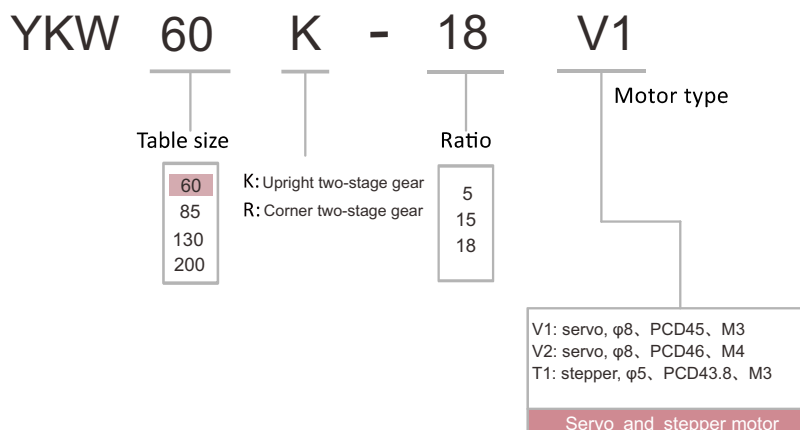


Specifications

Model		YKW60K-5□	YKW60K-18□	YKW60R-15□	
Max. torque	N·m	5			
Max. axial load (Ka)	kg	10			
Max. radial force (Fr)	N·m	5			
Max. speed of table		720° / sec			
Gear ratio	i	5、15、18			
Positioning precision		3arc-min		8arc-min	
Repetitive precision		±15arc-sec		±30arc-sec	
Lifetime of precision(h)		≥15000			
Protection rating		IP40			
Temperature		0℃ ~ +60℃			
Weight	kg	0.6	0.6	1.5	1.5

* More ratios available and customization accepted.

Position Precision Inspections

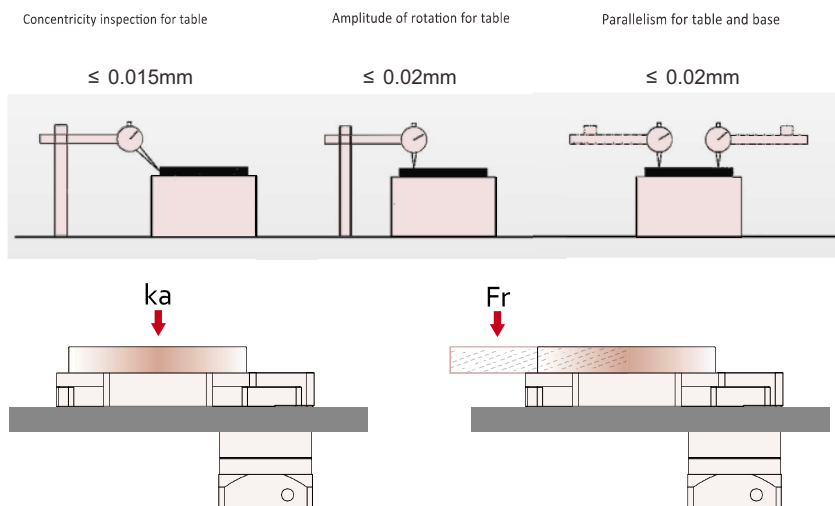


Customization Information


- ▲ The customization of $\leq 0.002\text{mm}$ rotation amplitude
 - ▲ $\leq 0.002\text{mm}$ parallelism is also available.
- For special needs, please contact with us.

YKW60 Series Mechanical Drawings in mm

YKW60K-(5/18)V2

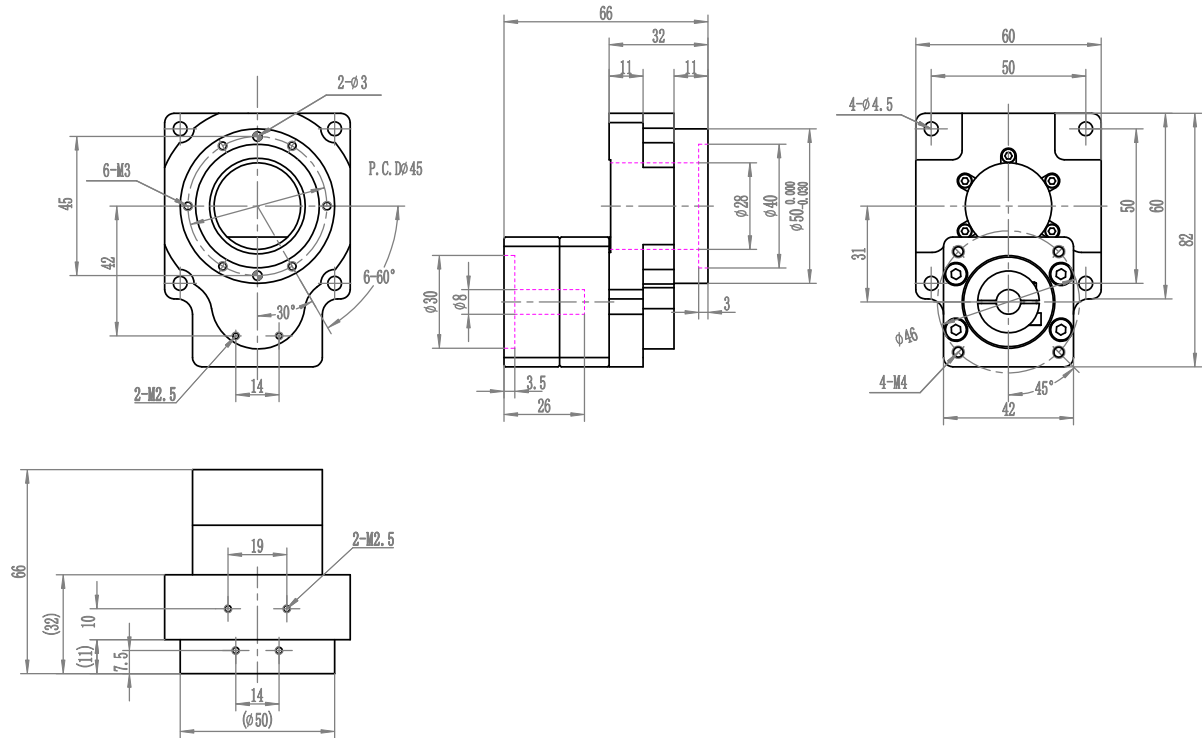

YKW60K-(5/18)T1

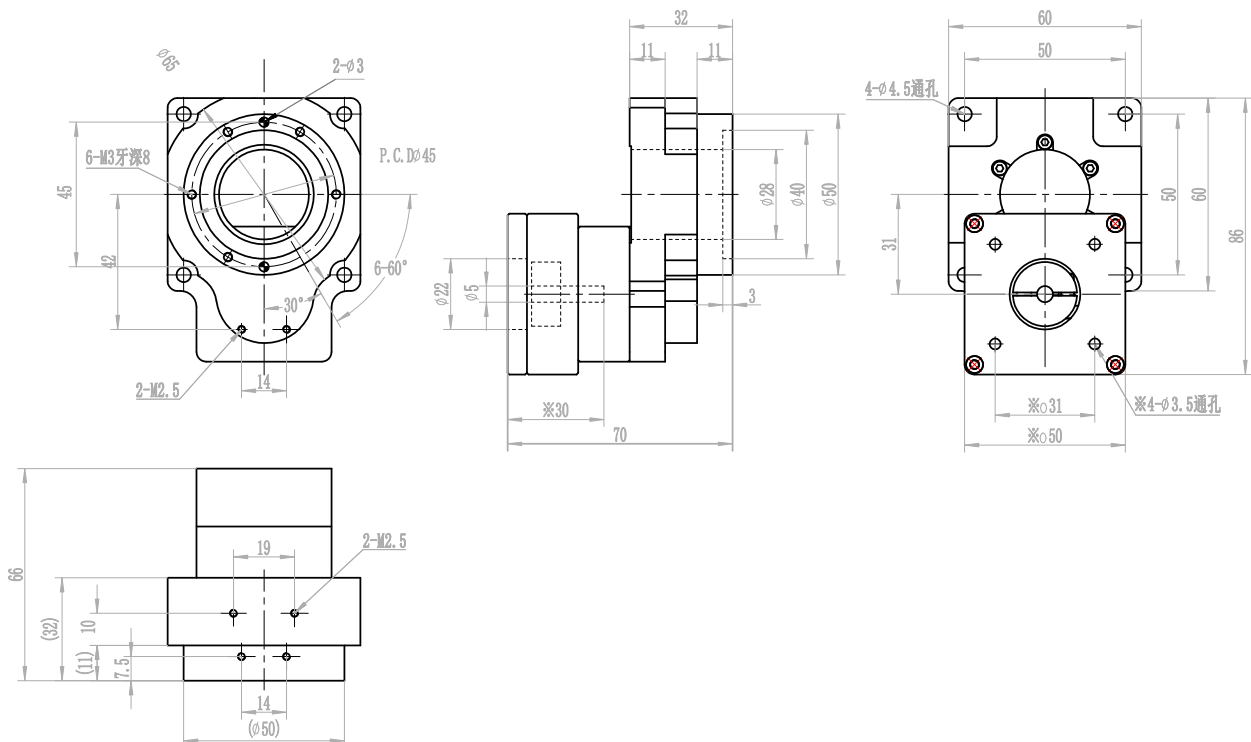

30

YKW60 Series Mechanical Drawings in mm

YKW60R

